




Client: Phil Robson
 Address:
 Telephone number:
 Site address:

Sketch

Description

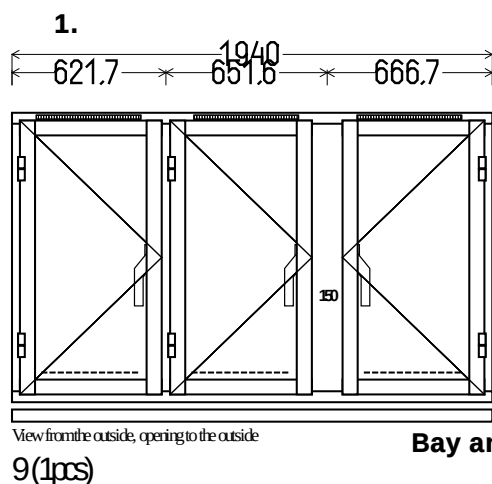


View: From outside / opening to the outside
Type: D'Lux profile FLUSH CASEMENT (fully finished)
Wood: Engineered Scandinavian wood PINE
Fitting: 3 x Side Swing with lockable handle/
 multipoint locking/restrictor
Glass: 4mm /16Argon /4 Low-e
 (warm edge CH ultra RAL7035 grey Energy class A)
Seal: Grey gaskets/Transparent silicone
Finish: internal RAL 9010 white / external RAL3002 red
 micro porous painting / fully finished
Bars: not requested
External sill: 60mm extended hardwood / RAL3002 red
Internal sill: solid wood / RAL9010
Bay angle connector: not requested
Architraves: not requested
Ventilation: 3 x trickle vent

1 unit
Rear elevation / ground floor

Price per unit: £1,313.12

Total price: £1,313.12

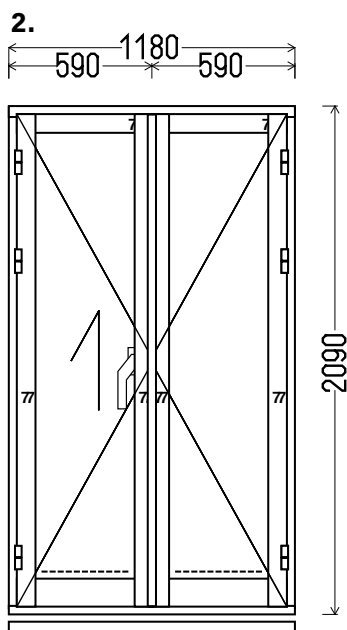

View from the outside, opening to the outside

8(1pcs)

1 unit

View:	From outside
Type:	D'Lux profile TERRACE DOOR "77mm profile" (fully finished)
Wood:	Engineered Scandinavian wood PINE
Fitting:	1. Secondary outward opening door 2. Main outward opening door
Glass:	33.1 laminate / 12 argon / 33.1 laminate Low-E Warm edge "thermix"
Silicone seal:	Grey gaskets/Transparent silicone
Finish:	internal RAL 9010 white / external RAL 9010 white micro porous painting / fully finished
Bars:	not requested
Threshold:	not requested
Sill:	60mm extended hardwood sill / oiled
Locking:	ASSA ABLOY lockable handle In – key / out – key ASSA FIX VINGA 7314 / finish optional Multipoint locking / MILA
Ventilation:	not requested

Price per unit: £1,441.79

Total price: £1,441.79

PRICE CALCULATED:

TOTAL	for supply only	£2,754.91
TOTAL	for discount	-3.5 %
TOTAL	for installation	4.78m² x £168
VAT	20 %	£692.31
TOTAL INC. VAT:		£4,153.84

Payment and Installation Conditions

PAYMENT SCHEDULE (All payments have to be done by bank transfer or by cheque and made payable to Natural Windows Limited):

Total cost	£4,153.84
Less deposit to be paid upon signing the Contract (25%)	£1,038.46
Less amount to be paid when goods are ready for delivery (60%)	£2,492.30
Final amount to be paid on completion (15%)	£623.08

INSTALLATION SCHEDULE:

Casement goods ready in

9-10 weeks